


AV PRO SD



C R

E A

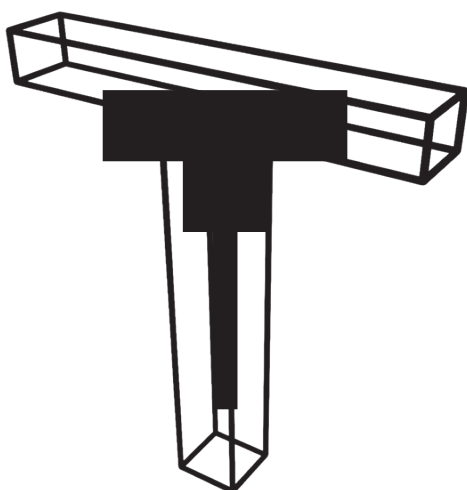

E

ANGELBIRD.COM

THERE TO CAPTURE
YOUR CREATIVE MOMENTS



TODAY’S ENDLESS BIT DEPTH, HIGH FRAME RATES, AND HIGH RESOLUTIONS—4K AND BEYOND—REQUIRE STORAGE SOLUTIONS THAT ARE JUST AS ADVANCED. MEMORY CARDS NEED TO BE FAST, HIGH-CAPACITY, WIDELY COMPATIBLE AND, OF COURSE, EXTREMELY RELIABLE. OUR AV PRO SD CARDS ARE BUILT TO MEET THOSE DEMANDING CRITERIA, NOT ONLY FOR DSLR SYSTEMS BUT ALSO WITH DRONES, WHERE EXTREMES OF TEMPERATURE AND HUMIDITY, AS WELL AS SHOCK, ARE COMMON CHALLENGES.

SPECIFICATIONS AND FEATURES



Sustained read speed **170 MB/s**
Sustained write speed **105 MB/s**



X-ray & magnetic proof



64 | 128 | 256 | 512GB



**Shock, dust, water,
temperature proof**



**SDXC™ | UHS-II | U3 |
Class 10 | V60**



Water proof



**Records full HD, 3D and
4K video**



Sticker-free™



Stable Stream™



**Built-in write-protect
switch**



**Operation: -25°C | 85°C
Storage: -40°C | 85°C**

SPECIFICATIONS / ORDERING

AVP
RO
SD
V60

GENERAL SPECIFICATIONS

Capacity
64 | 128 | 256 | 512 GB

Dimensions
32.0 × 24.0 × 2.1 mm
(1.26 × 0.94 × 0.08 in)

Form Factor
SD

Weight
~ 2.0 g

TECHNICAL SPECIFICATIONS

Interface
SDXC™, SD 5.0, UHS-II

Features
Write protection by mechanical switch,
wear leveling, power management for
low power usage, ECC, water resistant

PERFORMANCE SPECIFICATIONS

Sustained Read Speed ¹
170 MB/s

Sustained Write Speed ¹
105 MB/s

Works with ³

Canon | Sony | Leica | Nikon | Fujifilm |
Blackmagic Design | Hasselblad | Pentax |
Panasonic | Olympus | Lumix | and others

RELIABILITY SPECIFICATIONS

Data Reliability
ECC function

Certifications
RoHS, CE, FCC

ELECTRICAL SPECIFICATIONS

DC input voltage
1.8V ± 5%

Power usage (idle/max)
2mW / 1.2W

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature
-25 °C ~ +85 °C

Storage Temperature
-40 °C ~ +85 °C

Operating Humidity
25 % to 85 % non-condensing

WARRANTY ²

3-year limited warranty

PACKAGE CONTENT

- AV PRO SD V60
- Activation code for the full limited warranty and additional free software licenses and content

RETAIL PACKAGING DETAILS

Box dimension
113.0 × 102.0 × 10.5 mm
(4.45 × 4.02 × 0.41 in)

Weight
~ 16.0 g | ~ 0.56 oz.


¹ Speed based on internal testing

² To receive the full limited warranty, the product needs to be registered on the Angelbird Personal Service Portal within 30 days after purchase. If not registered within this period, the market-specific legal guarantee period comes into force.

³ For an up-to-date compatibility list, please visit the product site at www.angelbird.com

SD™ is a registered trademark of SD-3C LLC.
Blackmagic Design® is a registered trademark of Blackmagic Design Pty. Ltd.
Canon® is a registered trademark of Canon Inc.
Sony® is a registered trademark of Sony Corporation.
NIKON is a trademark of NIKON CORPORATION.
Fujifilm® is a registered trademark of Fujifilm.
Hasselblad® is a registered trademark of Hasselblad.
PANASONIC® is a registered trademark of Panasonic Corp.
Leica® is a registered trademark of Leica Microsystems IR GmbH.
Pentax is trademark of HOYA Corporation.
Olympus® is a registered trademark of Olympus Corporation.
LUMIX® is a registered trademark of Panasonic Corporation.
Other product names used herein are for identification purposes only and may be trademarks of their respective owners. Angelbird disclaims any and all rights in those marks.

ORDERING INFORMATION

	Capacity	SKU	EAN	UPC
●	64GB	AVP064SDV60	9120056584062	812937022884
●	2 × 64GB	AVP064SDV60X2	9120056584086	812937022907
●	128GB	AVP128SDV60	9120056584079	812937022891
●	2 × 128GB	AVP128SDV60X2	9120056584093	812937022914
●	256GB	AVP256SDV60	9120056583805	812937022624
●	2 × 256GB	AVP256SDV60X2	9120056583812	812937022631
●	512GB	AVP512SDV60	9120056583997	812937022815
●	2 × 512GB	AVP512SDV60X2	9120056584000	812937022822

SSD