


datavideo

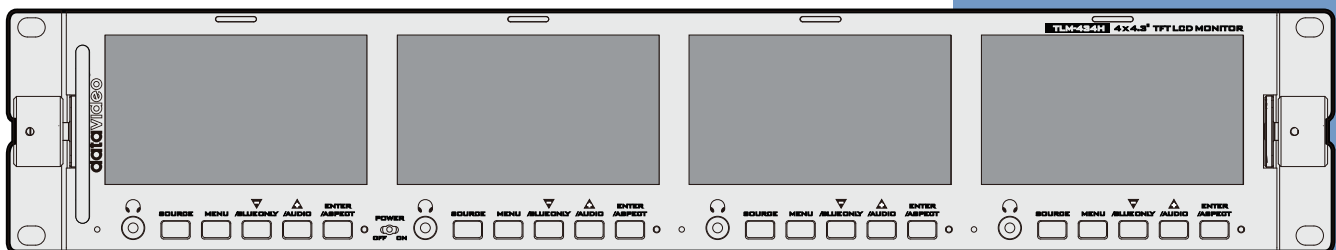

4 X 4.3" HD/SD TFT LCD MONITOR TLM-434H Instruction manual

www.datavideo.com

Table of Contents

FCC Compliance Statement	1
Warnings and Precautions	1
Warranty.....	2
Standard Warranty.....	2
Three Year Warranty.....	2
Disposal.....	2
Packing List	2
Introduction	3
Features	3
Supported Formats.....	3
Connections & Controls	4
Front Panel	4
Rear Panel.....	5
Tally Input Connector Information	5
Pin Assignment.....	5
Powering On.....	5
Menu Options	6
Picture.....	6
Func.	6
Setup.....	6
Advance	7
Example Set Ups	8
Specifications	9
Notes.....	10
Service & Support.....	12

Disclaimer of Product and Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Warnings and Precautions

1. Read all of these warnings and save them for later reference.
2. Follow all warnings and instructions marked on this unit.
3. Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this unit in or near water.
5. Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
8. Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
9. If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord's rating.
10. Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
11. Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
 - e. When the product has been dropped or the cabinet has been damaged;
 - f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Standard Warranty


- Datavideo equipment are guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- The product warranty period begins on the purchase date. If the purchase date is unknown, the product warranty period begins on the thirtieth day after shipment from a Datavideo office.
- All non-Datavideo manufactured products (product without Datavideo logo) have only one year warranty from the date of purchase.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered under warranty.
- Viruses and malware infections on the computer systems are not covered under warranty.
- Any errors that are caused by unauthorized third-party software installations, which are not required by our computer systems, are not covered under warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- All accessories including headphones, cables, and batteries are not covered under warranty.
- Warranty only valid in the country or region of purchase.
- Your statutory rights are not affected.

Three Year Warranty

- All Datavideo products purchased after July 1st, 2017 are qualified for a free two years extension to the standard warranty, providing the product is registered with Datavideo within 30 days of purchase.
- Certain parts with limited lifetime expectancy such as LCD panels, DVD drives, Hard Drive, Solid State Drive, SD Card, USB Thumb Drive, Lighting, Camera module, PCIe Card are covered for 1 year.
- The three-year warranty must be registered on Datavideo's official website or with your local Datavideo office or one of its authorized distributors within 30 days of purchase.



Disposal



For EU Customers only - WEEE Marking

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



CE Marking is the symbol as shown on the left of this page. The letters "CE" are the abbreviation of French phrase "Conformité Européene" which literally means "European Conformity". The term initially used was "EC Mark" and it was officially replaced by "CE Marking" in the Directive 93/68/EEC in 1993. "CE Marking" is now used in all EU official documents.

Packing List

1	x	TLM-434H Unit
1	x	1.5 mm Hex Wrench
1	x	2.5 mm Hex Wrench
1	x	Switching Adaptor DC 12V / 2A
1	x	TLM-434H Instruction Manual

Introduction

Built within a strong 19-inch rack mountable unit, this bank of both HD & SD 4.3-inch (16:9 and 4:3) high quality TFT LCD monitors are perfect for integration into many set ups.

Each monitor has individual adjustments for contrast, brightness and colour saturation as well as LED tally light indication.

Connections include HD-SDI (BNC), SD-SDI (BNC) and HDMI Inputs. Embedded audio is supported on both

SDI & HDMI, with superimposed on-screen audio and time code indicator.

All four of the SDI / HD-SDI inputs include a seamless BNC bypass/loop through, ensuring the monitor is an ideal companion for switchers. This product is also perfect for integration within 19" system racks, OB Van, mobile studios and many more applications.

Features


- **Image Control**
Individual adjustments for contrast, brightness and colour saturation
- Colour Temperature Adjustment 9300K, 7500K, 6500K, 5400K or USER defined
- Blue Only Function button
- OSD Embedded Audio Peak Meter
- 3.5mm phone Jack for monitoring embedded HDMI / SDI audio sources with a headset
- OSD SDI embedded Time Code Indicator for SDI and HD-SDI inputs
- Overlay for Cinema Zone, 4:3 Area and Safe Area (OFF / 80% / 90%)
- **19" Rack mountable**
19-inch 2U high robust steel and aluminium design. Tilt up to 90 degrees
- **Video Inputs**
SDI / HD-SDI & HDMI input. Each SDI BNC input with bypass / loop through
- **Resolution**
RGB 480 x 272 pixel panels, handling 16:9 & 4:3 PAL/NTSC auto recognition
- **Tally Indication**
Standard 15-pin D-Sub tally connector for easy integration with existing equipment

Supported Formats

HDMI RGB	SDI / HD-SDI
- 720 x 576i x 50 Hz	- 720 x 576i / 50 Hz
- 720 x 480i x 60 Hz	- 720 x 480i / 60 Hz
- 1280 x 720p x 50 Hz	- 1280 x 720p / 60 Hz
- 1280 x 720p x 60 Hz	- 1280 x 720p / 50 Hz
- 1920 x 1080i x 50 Hz	- 1920 x 1080i / 50 Hz
- 1920 x 1080i x 60 Hz	- 1920 x 1080i / 60 Hz

Connections & Controls

Front Panel

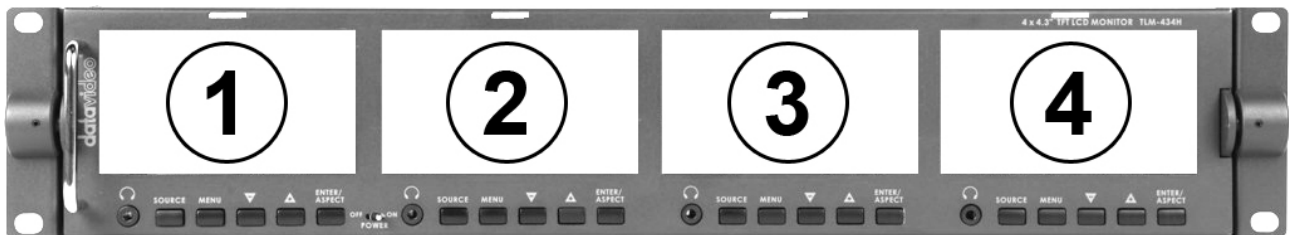

Power Switch

Switches the power On / Off.



3.5 mm Stereo Phone Jack

For stereo headphones. The headphone volume is controlled by the Audio Level button.

N.B. Audio source from HDMI or SDI embedded audio.



Source Button

Select Input source between HD-SDI / SDI and HDMI.

LED ON = HDMI source selected

LED OFF = SDI / HD-SDI source selected



MENU

Calls up the on-screen adjustment menu (See Menu Options for more details).



UP / Audio Level (+) Button

Navigate the on-screen menu and set the functions & levels.

Allow you to control the headphones volume (+).



Down / Audio Level (-) Button

Navigate the on-screen menu and set the functions & levels.

Allow you to control the headphones volume (-).

BLUE ONLY

The BLUE ONLY button is set blue only enable, Press this button to eliminate the red and green component of input signals. Only the blue component of an input is displayed on the screen.





ENTER

Confirms the new settings or return to the default state.

ASPECT Ratio Button

Sets the LCD aspect ratio to 16:9 or 4:3

Rear Panel

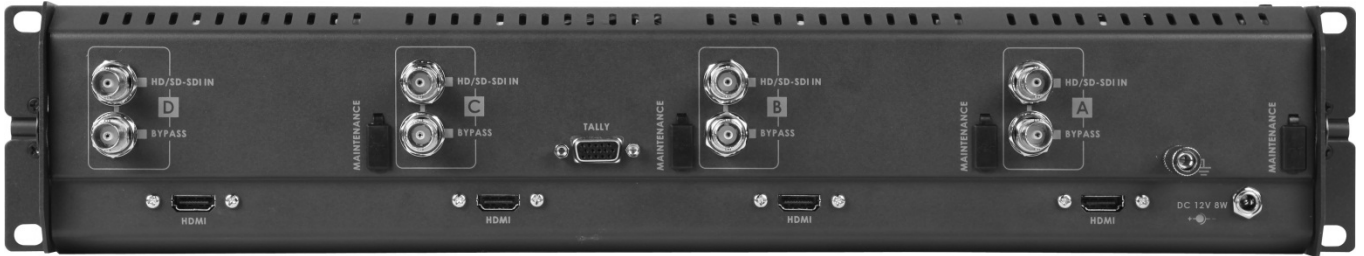

SDI / HD-SDI input and Bypass

BNC connector for SDI / HD-SDI Input and Bypass / Loop through.
Bypass / Loop through BNC connector only works with SDI / HD-SDI input.



HDMI input

HDMI digital signal input connector.
Support HDMI 1.1



15Pin D-Sub Tally Input

Send in red and yellow colour tally signal to tally LED. Red means on-air, yellow means standby. See below table.




DC in socket

Connect the supplied 12V 2A PSU to this socket. The connection can be secured by screwing the outer fastening ring of the DC In plug to the socket.

Tally Input Connector Information

Pin Assignment

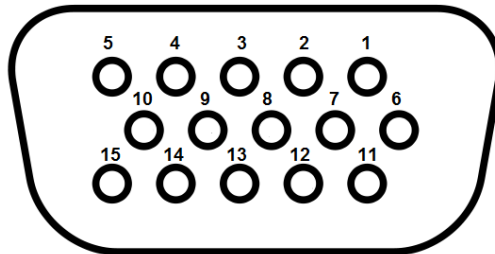

D-Sub 15pin Female

The pin assignment of the Tally Connector is shown in the following table:

Panel / Source	On Air - Red LED	Standby - Yellow LED
A / 1	Pins 1 & 4	Pins 3 & 14
B / 2	Pins 6 & 4	Pins 8 & 14
C / 3	Pins 11 & 4	Pins 13 & 14
D / 4	Pins 5 & 4	Pins 15 & 14

Powering On

Connect the TLM-434H power supply to the DC In socket. Ensure the power cable is connected to a suitable mains socket.



Switch the power On/Off switch to the ON position and all 4 panels will become active.

Menu Options

The TLM-434H is a menu driven unit; there are 4 menus for each panel. These menus are used to initially set up the unit. The menu settings are non-volatile (settings are stored even when the unit is switched off). So many of the settings will only need to be set once. The On Screen Display menu options are hidden if no button is pressed within a certain time (see Setup menu, OSD Timer).

Picture

- Press the **MENU** button to enter the system **Picture** mode.
- Press **ENTER** button into the Picture setting position.
- Press **UP** / **DOWN** button moving to the **Brightness** setting.
- Press **ENTER** button to select the Brightness setting value.
- Press **UP** / **DOWN** button to change the Brightness value from 0~100
- Press **MENU** button to return to the Picture setting menu.
- Press **SOURCE** button exit the setting mode.

***N.B.** To select a different setting (**Contrast, Saturation, Tint**) use the **UP** / **DOWN** buttons.
Follow the same procedure to set these values as required.*

Func.

- Press the **MENU** button three times into the **Func.** mode.
- Press **ENTER** button to select the Func. setting.
- Press **UP** / **DOWN** button moving to the **Safety Zone** setting.
- Press **ENTER** button to select Safety Zone value (80%, 90% or OFF).
- Press **UP** / **DOWN** button exit the setting mode.

***N.B.** To select a different function (**4:3 Screen, Cinema Zone**) use the **UP** / **DOWN** buttons.
Follow the same procedure to set these functions as required.*

Setup

- Press the **MENU** button four times into the **Setup** mode.
- Press **ENTER** button into the Setup setting position.
- Press **UP** / **DOWN** button moving to the **OSD Timer** setting.
- Press **ENTER** button into the OSD Timer setting position.
- Press **UP** / **DOWN** button to select the OSD display on screen time (value from 5~60 SEC).
- Press **ENTER** button to setting the OSD display on screen time.

- Press **UP** / **DOWN** button moving to the **OSD Blending** setting.
- Press **ENTER** button into the OSD Blending setting position.
- Press **UP** / **DOWN** button to select the OSD blending display on screen (value from 0~7).
- Press **ENTER** button to setting the OSD blending display on screen

- Press **UP** / **DOWN** button moving to the **Color Temp** setting.
- Press **ENTER** button to select the required Color Temperature (9300, 7500, 6500, 5400, USER).
- Press **UP** / **DOWN** button moving to the **Time Code** setting.
- Press **ENTER** button to select the Time Code ON/OFF on the screen.

- Press **UP** / **DOWN** button moving to the **TC Position** setting.
- Press **ENTER** button to select the Time Code Position on the screen (Left/Up, Middle/Down, Right/Down, Right/Up)

- Press **UP** / **DOWN** button moving to the **TC Font Size** setting.
- Press **ENTER** button to select the time code font size on the screen (Large or Small).

- Press **MENU** button return to the **Setup** setting menu.
- Press **SOURCE** button exit the setting mode.

Advance



- Press the **MENU** button five times into the **Advance** setting mode.
- Press **ENTER** button into the Advance setting position.
- Press **ENTER** button into the **Indicator** setting position.
- Press **ENTER** button to setting the Indicator ON/OFF

- Press **UP** / **DOWN** button moving to the **Reset** setting.
- Press **ENTER** button which will return all the settings of the monitor to the factory defaults.

- Press **UP** / **DOWN** button moving to the **Version** setting.
- Press **ENTER** button, the version information will display on screen.
- Press **SOURCE** button exit the setting mode.

- Press **UP** / **DOWN** button moving to the **Backlight** setting.
- Press **ENTER** button into the Backlight setting position.
- Press **UP** / **DOWN** button to setting the Backlight values from 0~100
- Press **MENU** button return to the Advance setting menu.
- Press **SOURCE** button exit the setting mode.

Example Set Ups

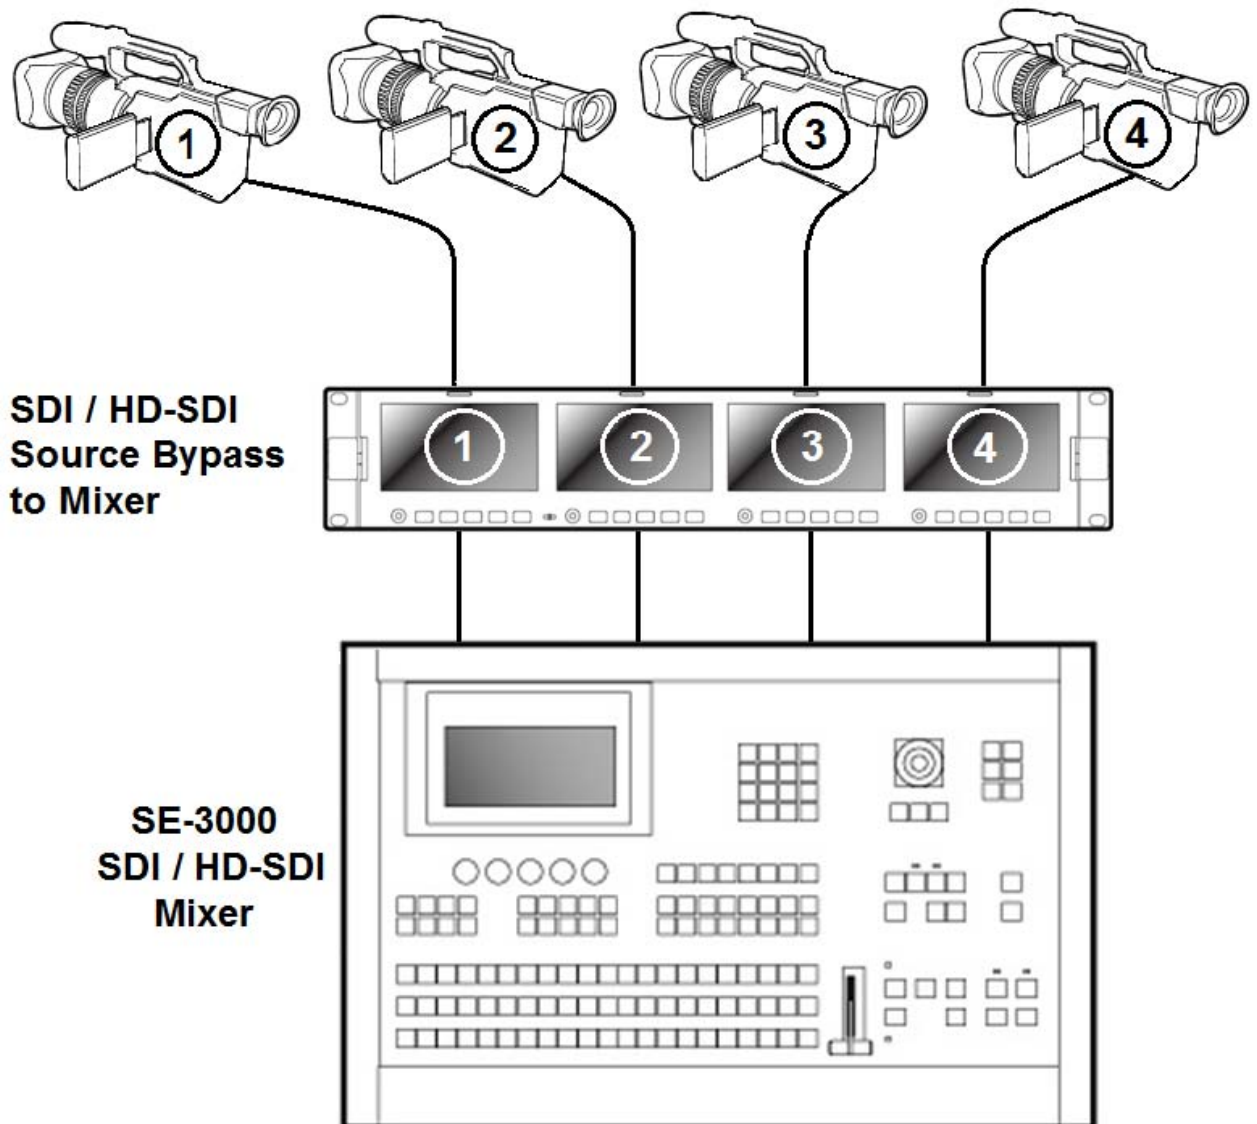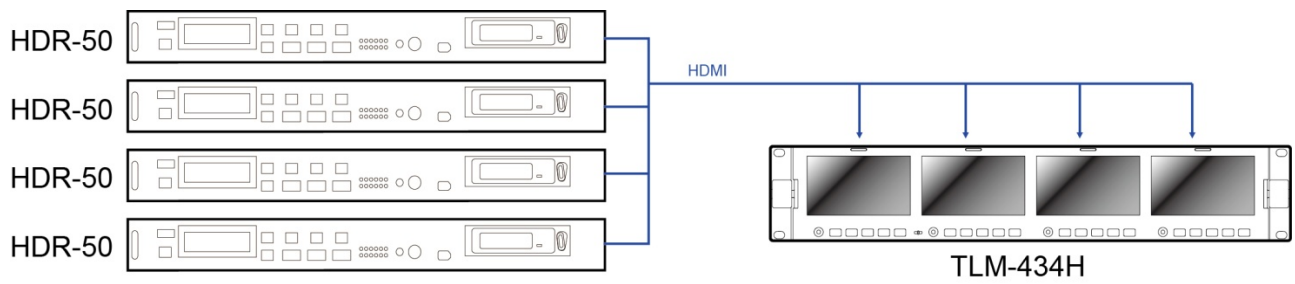

Specifications

LCD Display	4 x 4.3" TFT LCD
Resolution	RGB 480 x 272 pixel
Aspect Ratio	4:3 and 16:9 selectable
Brightness (Luminance)	500 cd/m ²
Contrast Ratio	300
View Angle	Top: 50 deg / Bottom: 70 deg Left: 70 deg / Right: 70 deg When using available 2U 19" rack mount this product can support the following adjustable view angle (Tilt 45 degree viewing angle)
Video Input	HDSDI/SD-SDI & HDMI
Video System	NTSC/PAL auto recognition
Colour Adjustment	Brightness, Contrast, Colour Saturation
Tally Indication	1 per monitor
Operation condition	Operation 0°C to 50°C, RH less than 90%
Power Consumption	12V 2A (23W)
Weight	Packed 2.38kg Unit only 1.58kg
Dimensions (W x H x D)	482.20 x 88 x 64.20

Notes

Notes

Service & Support

It is our goal to make owning and using Datavideo products a satisfying experience. Our support staff is available to assist you to set up and operate your system. Contact your local office for specific support requests. Plus, please visit www.datavideo.com to access our FAQ section.

China Shanghai
Datavideo Technologies China Co
601, Building 10, No. 1228,
Rd. Jiangchang,
Jingan District, Shanghai
Tel: +86 21-5603 6599
Fax: +86 21-5603 6770
E-mail: service@datavideo.cn

China Beijing
Datavideo Technologies China Co
No. 812, Building B, Wankai Center,
No. 316, Wan Feng Road, Fengtai District,
Beijing, China
Tel: +86 10-8586 9034
Fax: +86 10-8586 9074
E-mail: service@datavideo.cn

China Chengdu
Datavideo Technologies China Co
B-823, Meinian square, No. 1388,
Middle of Tianfu Avenue, Gaoxin District,
Chengdu, Sichuan
Tel: +86 28-8613 7786
Fax: +86 28-8513 6486
E-mail: service@datavideo.cn

China Fuzhou
Datavideo Technologies China Co
A1-2318-19 Room, No. 8, Aojiang Road,
Taijiang District, Fuzhou, Fujian, China
Tel: 0591-83211756 · 0591-83210187
Fax: 0591-83211262
E-mail: service@datavideo.cn

China Jinan
Datavideo Technologies China Co
902, No. 1 business building,
Xiangtai Square, No. 129,
Yingxiongshan Road, Shizhong District,
Jinan City, Shandong Province, China
Tel: +86 531-8607 8813
E-mail: service@datavideo.cn

Hong Kong
Datavideo Hong Kong Ltd
G/F., 26 Cross Lane
Wanchai, Hong Kong
Tel: +852-2833-1981
Fax: +852-2833-9916
E-mail: info@datavideo.com.hk

India Noida
Datavideo India Noida
A-132, Sec-63, Noida-201307,
India
Tel: +91-0120-2427337
Fax: +91-0120-2427338
E-mail: sales@datavideo.in

India Kochi
Datavideo India Kochi
2nd Floor- North Wing, Govardhan Building,
Opp. NCC Group Headquarters, Chittoor Road,
Cochin- 682035
Tel: +91 4844-025336
Fax: +91 4844-047696
E-mail: sales@datavideo.in

Netherlands
Datavideo Technologies Europe BV
Floridadreef 106
3565 AM Utrecht,
The Netherlands
Tel: +31-30-261-96-56
Fax: +31-30-261-96-57
E-mail: info@datavideo.nl

Singapore
Datavideo Visual Technology(S) Pte Ltd
No. 178 Paya Lebar Road #06-07
Singapore 409030
Tel: +65-6749 6866
Fax: +65-6749 3266
E-mail: info@datavideovirtualset.com

Singapore
Datavideo Technologies (S) PTE Ltd
No. 178 Paya Lebar Road #06-03
Singapore 409030
Tel: +65-6749 6866
Fax: +65-6749 3266
E-mail: sales@datavideo.sg

Taiwan
Datavideo Technologies Co. Ltd
10F. No. 176, Jian 1st Rd., Chung Ho
District, New Taipei City 235, Taiwan
Tel: +886-2-8227-2888
Fax: +886-2-8227-2777
E-mail: service@datavideo.com.tw

United States
Datavideo Corporation
7048 Elmer Avenue.
Whittier, CA 90602,
U.S.A.
Tel: +1-562-696 2324
Fax: +1-562-698 6930
E-mail: sales@datavideo.com

United Kingdom
Datavideo UK Limited
Brookfield House, Brookfield Industrial
Estate, Peakdale Road, Glossop,
Derbyshire, SK13 6LQ
Tel: +44-1457 851 000
Fax: +44-1457 850 964
E-mail: sales@datavideo.co.uk

France
Datavideo France s.a.r.l.
Cit  Descartes 1, rue Albert Einstein
Champs sur Marne 774477 –
Marne la Vall e cedex 2
Tel: +33-1-60370246
Fax: +33-1-60376732
E-mail: info@datavideo.fr



Please visit our website for latest manual update.
www.datavideo.com/product/TLM-434H

datavideo
www.datavideo.com