




MATCH PACK

for Canon EOS C200

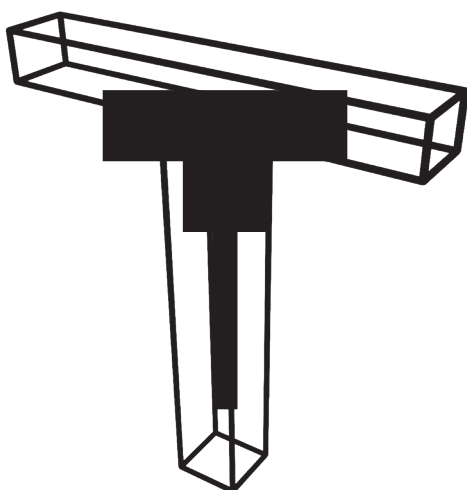

SPECIAL PRODUCTION WITH EXTENDED TESTING
PROVES THE AV PRO CF MATCH PACK A PERFECT
MATCH FOR CANON EOS C200

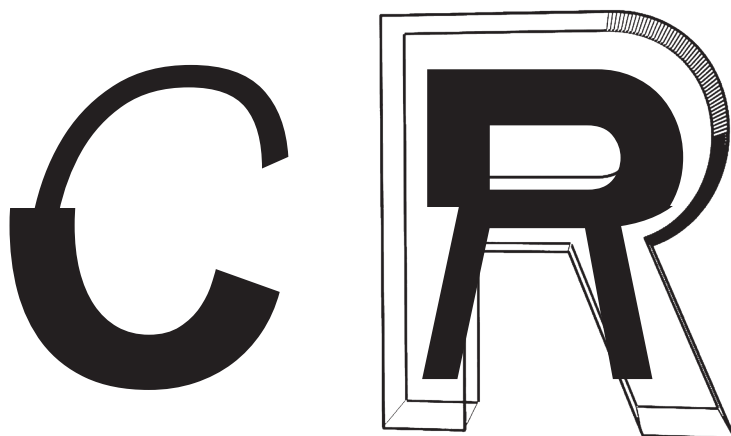

ANGELBIRD.COM

GENERAL FEATURES



Built for:
Canon EOS C200



Optimised for RAW recording
and Dual Card Mode



Two identical cards
of the same production



Stable Stream™



Every unit 100 % tested



X-ray & magnetic proof



Rock-solid build



Media Pouch for
4 × CFast / CF | 6 × SD | 2 × XQD

AV PRO CF - SPECIAL FEATURES



1 × AV PRO CF 256 GB



Sustained read speed 550 MB/s
Sustained write speed 400 MB/s



CFast 2.0 compliant



Records full HD, 3D, and 4K video



Shock, dust, temperature
proof



Operation: -20°C / 85°C
Storage: -40°C / 85°C



ESD & overload protection

AV PRO SD - SPECIAL FEATURES



2 × AV PRO SD 128 GB



Sustained read speed 300 MB/s
Sustained write speed 260 MB/s



SDXC™ | UHS-II | U3 | Class 10 |
V90



Records full HD, 3D, and 4K video



Shock, dust, water, temperature
proof



Operation: -25°C / 85°C
Storage: -40°C / 85°C



Built-in write-protect switch

M
A
T
C
H
P
A
C
K

C
2
0
0

SPECIFICATIONS / ORDERING

AV PRO CF

GENERAL SPECIFICATIONS

Capacity
1 × AV PRO CF 256 GB

Dimensions
42.8 × 36.4 × 3.3 mm
(1.69 × 1.43 × 0.13 in)

Form Factor
CFast

Weight
~ 10.0 g

TECHNICAL SPECIFICATIONS

Interface
CFast 2.0 compliant

Over provisioning
~ 7.6 %

Features
Temperature sensor, TRIM, ECC, EMS
protection, built-in cache, SMART

PERFORMANCE SPECIFICATIONS

Sustained Read Speed ¹
550 MB/s

Sustained Write Speed ¹
400 MB/s

RELIABILITY SPECIFICATIONS

MTBF
> 2,400,000 hours

Data Reliability
Built-in EDC / ECC function

Data Retention
10 years at 25°C

Certifications
RoHS, CE, FCC

ELECTRICAL SPECIFICATIONS

DC input voltage
3.3V ± 5%

Power usage (idle/max)
0.37W / 2.22W

ENVIRONMENTAL SPECIFICATIONS

Shock resistance (operating)
50G

Vibration resistance (operating)
3.1G

Operating Temperature
-20°C ~ +85°C

Storage Temperature
-40°C ~ +85°C

Operating Humidity
5% to 95% non-condensing

AV PRO SD

GENERAL SPECIFICATIONS

Capacity
2 × AV PRO SD 128 GB

Dimensions
32.0 × 24.0 × 2.1 mm
(1.26 × 0.94 × 0.08 in)

Form Factor
SD

Weight
~ 2.0 g

TECHNICAL SPECIFICATIONS

Interface
SDXC™, SD 4.0, UHS-II

Features
Write protection by mechanical switch,
wear leveling, power management for
low power usage, ECC, water resistant

PERFORMANCE SPECIFICATIONS

Sustained Read Speed ¹
300 MB/s

Sustained Write Speed ¹
260 MB/s

RELIABILITY SPECIFICATIONS

Data Reliability
ECC function

Certifications
RoHS, CE, FCC

ELECTRICAL SPECIFICATIONS

DC input voltage
1.8V ± 5%

Power usage (idle/max)
2mW / 1.2W

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature
-25°C ~ +85°C

Storage Temperature
-40°C ~ +85°C

Operating Humidity
25% to 85% non-condensing

SSD

M
A
T
C
H
P
A
C
K

C
2
0
0

SPECIFICATIONS / ORDERING

M A T C H P A C K C 2 0 0

DESIGNED FOR

CANON EOS C200 Camera

- ¹ Speed based on internal testing
² To receive the full limited warranty, the product needs to be registered on the Angelbird Personal Service Portal within 30 days after purchase. If not registered within this period, the market-specific legal guarantee period comes into force.

WARRANTY²

3-year limited warranty

CFast® and Compact Flash® are registered trademarks of the Compact Flash Association.
SD™ is a registered trademark of SD-3C LLC.
Canon® is a registered trademark of Canon Inc
All other marks are property of their respective owners.

PACKAGE CONTENT


- 1× AVP256CF | 2× AVP128SD
- Media Pouch
- basICColor Mini Target
- Activation code for the full limited warranty and additional free software licenses and content

RETAIL PACKAGING DETAILS

Box dimension
145.0 × 102.0 × 41.0 mm
(5.71 × 4.02 × 1.61 in)

Weight
~ 60.0 g

ORDERING INFORMATION

 Capacity	SKU	EAN	UPC
● 1× AVP256CF, 2× AVP128SD	MP-C200	9120056583645	812937022464

SSD